Incheon A-CDM Operation Manual



Incheon International Airport



Log of Revision

NO.	Date applicable	Based on	Main Contents of Amendments	Remarks
Rev.0	Nov 30 2017	IIAC, Aerodrome Operations Group-4792	- Establishment of A-CDM Operation Manual	
Rev.1	May 28 2018	IIAC, Aerodrome Operations Group-1688	 Inserted Log of Revision Reflected ATCC COBT Modified Milestones(inserted SOBT) Modified the automatic TOBT generation standard(considering massive delay) Added VDGS introduction and features Unified TSAT vocabularies (System TSAT/Tower TSAT) Reflected system update and modified other phrases 	
Rev.2	Nov 5 2018	IIAC, Aerodrome Operations Group-3996	- Change Milestones Time	
Rev.3	Dec 26 2019	IIAC, Aerodrome Operations Group-6930	 Modified Inbound Milestones (deleted SLDT/inserted SIBT) Reflected Mobile A-CDM System Operation of A-CDM Operation center CTOT's applying and sharing(deleted COBT) Changed VDGS display Added contingency procedure Reflected system update and modified other phrases 	
Rev.4	Oct. 2022	IIAC, Aerodrome Service Group–4993	l- Added de-icing/anti-icing milestones	



A-CDM Operation Manual Rev. 5

NO.	Date applicable	Based on	Main Contents of Amendments	Remarks
Rev.5	June, 2025	IIAC, Aerodrome Service Group-2969	 Adjusted phase 2 operation period Changed updating EOBT procedure Changed de-icing/anti-icing request, cancle procedure Reflected mobile A-CDM APP enhancement Reflected system improvement and modified other phrases 	



Intentionally Left Blank



Table of Contents

Chapter	oter Article Title		Page		
Revision	Revision History and List of Effective Page				
Table of Contents					
Chapter 1	General		2		
	1.1	Purpose	2		
	1.2	Scope of Application	2		
	1.3	Relevant Rationale and International Standards	2		
	1.4	Definitions	3		
Chapter 2	Incheon	A-CDM Introduction	8		
	2.1	Overview	8		
	2.2	Basic Procedure	10		
	2.3	Major Milestones	20		
	2.4	De-icing/Anti-icing	32		
Chapter 3	A-CDM S	System	36		
	3.1	System Overview	36		
	3.2	How to Access System	36		
	3.3	Layout of All Menus	38		
	3.4	Main Screens	38		
	3.5	TOBT Update	48		
	3.6	Mobile APP	50		
	3.7	Alarm Message	54		
	3.8	State Message	56		
Chapter 4	Contingency Procedures		57		
	4.1	Overview	57		
	4.2	Types of Contingency	57		
	4.3	Response Procedure	58		

Chapter 1 General

1.1 Purpose

This manual is to help users to understand Airport-Collaborative Decision Making (A-CDM) developed to utilize limited resources effectively and to support efficient flight operation in response to the increasing demand for air traffic. It is aimed at sharing flight operation and resource information of the Incheon International Airport with air traffic controllers, Airport Corporation, aircraft operators, ground handlers and other collaborative partners and enabling efficient decision-making and rapid response by using A-CDM system and other associated systems in an effective manner.

Scope of Application

This manual is applicable to Seoul Regional Office of Aviation, Incheon International Airport Corporation, aircraft operators, ground handlers, etc.

1.3 Relevant Rationale and International Standards

1.3.1 Domestic Rationale

Detailed Operation Manual for Aviation Traffic Flow Control (Official Order of Air Traffic Management Office)

1.3.2 International Rationale and Standards

- 1. ICAO, Aviation System Block Upgrade (ASBU)
- 2. ICAO, DOC 9971 (Manual on Collaborative Air Traffic Flow Management)
- 3. Eurocontrol, Manual (Airport CDM Implementation Ver.5)



Gate

A-CDM Operation Manual

1.4 Definitions

Terms and abbreviations used in this Manual are defined as follows:

ATFMS Air Traffic Flow Management System is used by the Air Traffic

Command Center and provides CTOT and FIR time information.

DMAN Departure Manager is a planning system to improve the

departure flows at an airport by calculating the Target Take Off Time (TTOT) and Target Start up Approval Time (TSAT) for each flight, taking multiple constraints

and preferences into account

FIA Flight Information Assistant is a system that enables

aircraft operator and ground handler to enter gate opening, passenger boarding, final call, etc. in front of the gate. It

enables TOBT input.

Turn Around Turn-Around refers to a series of processes starting from

the time an aircraft arrives at Incheon Airport, goes through ground handling and gets ready for departure, until

the time it leaves.

Milestone Milestones mean 16 reference points that affect the operation

and preparations of a flight during the processes where an inbound aircraft takes off from the originating airport and arrives at Incheon Airport, and an outbound aircraft gets ready to take off from Incheon Airport. They consist of detailed time

information. See <Table. A-CDM Milestone Information>

De-icing De-icing is removal of frost, ice or snow piled up or formed

on an import location of an aircraft surface for the purpose of the safety of an outbound flight. It is performed in a designated

place equipped with de-icing equipment.

Return-to- Return-to-Gate means a situation in which an aircraft has

to return to a parking stand after push-back or taxiing for reasons such as technical problem, weather condition,

passenger disembark, etc.

Each milestone consists of the time information used in this manual, which is defined Major Time Parameters are as below:

< Table. Major Time Parameters of A-CDM >

Acronyms	Term	Description
ACGT	Actual Commence of Ground handling Time	The time when ground handling on an aircraft starts.
ADIT	Actual De-icing Time	The actual time taken to spray de-icing/anti-icing fluid on the aircraft at the de-icing pad. * Calculated as AEZT-ACZT.
AEZT	Actual End of De-icing Time	The time when spraying of de-icing/anti-icing fluid on an aircraft and inspection are complete at the de-icing pad.
APIT	Actual de-icing Pad In Time	The time when an aircraft actually enters the pre-assigned de-icing pad for de-icing.
АРОТ	Actual de-icing Pad Out Time	The time when an aircraft actually exits the de-icing pad after de-icing.
ACZT	Actual Commence of De-icing Time	The time when de-icing/anti-icing fluid starts to be sprayed on an aircraft on the de-icing pad.
AIBT	Actual In Block Time	The time when an aircraft arrives in-blocks (the time when VDGS and ASDE recognize an aircraft in-blocks).
ALDT	Actual Landing Time	The time when an aircraft lands on a runway.
AOBT	Actual Off Block Time	The time when an aircraft is cleared by the Apron Control Tower and pushes back.
APP	Approach Control Unit	The time recognized by Seoul Approach Control Unit that an inbound aircraft approaches a terminal control area.
ARDT	Actual Ready Time for movement	The time when an aircraft is ready for start up on the stand. It is calculated with the time when a boarding bridge is removed from an aircraft.
ARIT	Actual Ramp In Time	The time when an aircraft approaches the apron after landing or when a pilot contacts the apron controller before approaching the apron.

Acronyms	Term	Description
AROT	Actual Ramp Out Time	The time when an aircraft enters the maneuvering area from the apron or when the apron controller transfers the frequency of an outbound aircraft to the control tower before it enters the maneuvering area.
ASAT	Actual Start Up Approval Time	The time when the Apron Control Tower gives push-back approval for an aircraft that received flight clearance so that it can depart (in case of remote spot, the time of approval for engine start-up).
ASBT	Actual Start Boarding Time	The time when an outbound aircraft starts passenger boarding.
ASRT	Actual Start Up Clearance Request Time	The time when a pilot of an outbound flight requests engine start-up or push-back for departure to the Apron Control Tower.
АТОТ	Actual Take Off Time	The time when an aircraft takes off from the runway.
AXIT	Actual Taxi In Time	The time required for an inbound aircraft to move from the runway to the aircraft stand after landing.
AXOT	Actual Taxi Out Time	The time required for an outbound aircraft to taxi from the aircraft stand to the runway.
AZRT	Actual De-icing Request Time	The time that the pilot actually requests the de-icing to the Apron Control Tower after confirming that the outbound aircraft is ready for departure.
стот	Calculated Take Off Time	The take-off time calculated and issued by the Air Traffic Command Center, taking into account the route capacity and adjusting the airport capacity. *COBT(Calculated off block time) Off block time provided from the Air Traffic Command Center for non-A-CDM airport
DMAN	Departure Manager	A control system that calculates the optimum target take off time (TTOT) and Target Start Up Approval Time(TSAT) for outbound flight by reflecting various parameters including TOBT, apron, taxi time, MDI(Minimal Distance Interval), ATFM restrictions, control separation interval and runway operation.

Acronyms	Term	Description
ECZT	Estimated Commence of De-icing Time	The estimated time to commence spraying of de-icing/anti-icing fluid on the aircraft at the de-icing pad.
EDIT	Estimated De-icing Time	The estimated time taken to spray de-icing/anti-icing fluid on the aircraft at the de-icing pad.
EEZT	Estimated End of De-icing Time	The estimated time to complete spraying and to end inspection of de-icing/anti-icing fluid on the aircraft at the de-icing pad.
EIBT	Estimated In Block Time	The estimated time when an aircraft arrives in-blocks after landing and taxiing.
EPIT	Estimated de-icing Pad In Time	The estimated time when an aircraft arrives in-blocks after landing and taxiing.
EPOT	Estimated de-icing Pad Out Time	The estimated time when an aircraft leaves the de-icing pad, factoring in the time required to move from the de-icing pad to the transfer of control point after de-icing/anti-icing.
ELDT	Estimated Landing Time	The estimated time when an aircraft will touch down on the runway. It refers to an estimated landing time automatically adjusted with AFTN, the time notified by an airline via wired communication, or a landing time calculated by the approach control radar when an inbound flight enters a terminal control area.
EOBT	Estimated Off Block Time	The estimated time at which an aircraft will start movement off-block for departure.
ERIT	Estimated Ramp In Time	The estimated time at which an aircraft will enter the apron after landing and moving to the apron.
EROT	Estimated Ramp Out Time	The time when an outbound aircraft is transferred from the Apron Control Tower to the control tower, after push-back.
ЕТОТ	Estimated Take Off Time	The estimated take-off time from the runway, which is calculated by adding EOBT and EXOT(or VTT).

Acronyms	Term	Description
EXIT	Estimated Taxi In Time	The estimated taxi time from the runway to the gate after landing.
EXOT	Estimated Taxi Out Time	The estimated taxi time for an outbound aircraft from the gate to the runway after push-back clearance.
FIR	Flight Information Region	The time recognized by the Air Traffic Control Center when an inbound aircraft approaches the Flight Information Region of the Republic of Korea.
МТТТ	Minimum Turn-round Time	The minimum turn-round time agreed with an AO/GH for a specified flight or aircraft type. It is set as the reference value for each aircraft operator or an average value of inbound/outbound quick-turn aircraft.
PDS	Pre-Departure Sequencing	The process to calculate and share the best departure time from the aircraft stand by reflecting the operation situation of the airport and air space in the cooperative decision making to secure smooth processing and on-time performance of air traffic
SIBT	Scheduled In Block Time	Scheduled time that an aircraft is expected to arrive at its parking position after landing.
SOBT	Scheduled Off Block Time	Scheduled time an aircraft is expected to depart from the parking position, derived by an aircraft operator schedule.
ТОВТ	Target Off Block Time	Target estimated time when an aircraft will be ready, boarding completed, all doors closed, boarding bridge removed, push-back vehicle available and the pilot ready to start up immediately upon reception of push-back clearance.
TSAT	Target Start Up Approval Time	Target estimated time that the Apron Control Tower is expected to approve push-back for an outbound aircraft (in case of remote spot, engine start-up approval time). It is calculated with TTOT generated by the control tower, on the basis of TOBT provided by an aircraft operator. However, it is restrictively issued and operated in Phase 1 Operation.
ттот	Target Take Off Time	The control tower's target take-off time taking into account TOBT, CTOT, traffic conditions, en-route situation and altitude separation. However, it is issued and operated restrictively in Phase 1 Operation.
VTT	Variable Taxi Time	The taxi time that an aircraft spends on the ground between its parking stand to the runway, or vice versa. A-SMGCS calculates it, factoring in an aircraft's ground taxing speed.




Chapter 2 Incheon A-CDM Introduction

2.1 Overview

- 2.1.1 Incheon Airport A-CDM supports the decision-making based on accurate forecasting for all partners including airport operator, the Air Traffic Control Center, aircraft operator and ground handler that perform the aircraft operation at the airport and other related jobs. Furthermore, it enables users to respond to the continuously increasing demand for air traffic and utilize limited resources at the airport efficiently, thereby actively managing flight delays.
- 2.1.2 The success of A-CDM depends on collaboration and efforts of partners to share time information such as aircraft operation support, preparation and air traffic control, which has been managed separately by individual entity, and to predict and comply with the target time based on the shared time information.
- 2.1.3 Individual partners share the pre-estimated flight operation time information via A-CDM System, which enables them to perform better decision-making by taking accurate measures in a timely manner. The whole process will help them to realize that they serve in the same aviation community.
- 2.1.4 Decision-making based on accurate forecasting is environment-friendly and also enhances the operational efficiency at the airport in that it optimizes the distribution of resources among individual partners and reduces unnecessary aircraft delay on the ground, which will reduce not only fuel costs but also carbon emissions.

2.1.5 A-CDM system takes the milestone approach that divides aircraft movement time information into milestones and manages flight arrival and departure time, taxiing, ground handling and so forth as milestone time information.

Thus, it allows for information management by systematically integrating with other systems at the airport such as the Air Traffic Service Unit, aircraft operators and ground handlers.

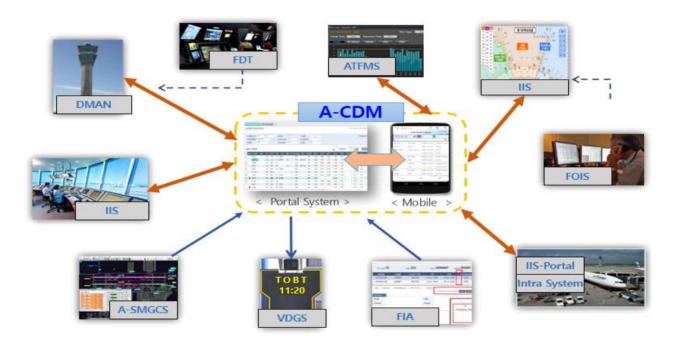

<Figure 2-1. Associated Systems of Incheon A-CDM>


- **2.1.6** The operation of Incheon Airport A-CDM is planned to be divided into 3 phases as follows:
 - Phase 1 Operation (Dec. 2017 ~ Sep. 2025): Share basic time information with partners via A-CDM and implement system stabilization
 - Phase 2 Operation (Sep. 2025 Dec. 2029): Improve TTOT/TSAT and enlarge the scope to cover de-icing/anti-icing information sharing by upgrading DMAN (Departure Manager)

Phase 3 Operation (Jan. 2030 -): Implement integrated airport operation that covers L/S as well as A/S through application of future airport operation concepts such as TAM(Total Airport Management) and PBAM(Performance based Airport Management)

2.2 Basic Procedure

2.2.1 Understanding of Milestones

2.2.1.1 Incheon Airport A-CDM defines the whole process as milestones from the moment an inbound aircraft gets ready and takes off from the originating airport toward Incheon Airport and arrives at Incheon Airport until it goes through turn-around including boarding and ground handling, becomes ready for departure and takes off from Incheon Airport.

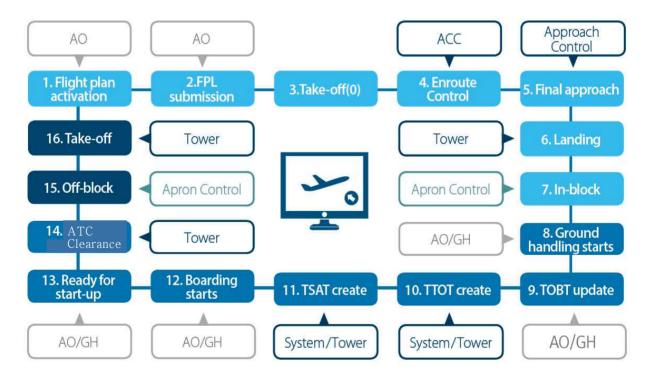

<Figure 2-2. Incheon A-CDM Milestone and Process>

2.2.1.2 Incheon A-CDM shares essential flight operation information generated from a total of 16 milestones that cover arrival, turn-around and departure, and it also provides partners with individual event occurrence information according to the procedure. Therefore, they can make the use of the information in a timely manner, make decisions and take immediate measures based on the updated information.

2.2.2 Role of Individual Collaborative Entity

- 2.2.2.1 Effects of Incheon Airport A-CDM can be maximized through active cooperation among partners such as the Air Traffic Service Unit, Incheon Airport Corporation, aircraft operators and ground handlers.
- 2.2.2.2 Ground handler shares accurate information on ground handling status and progress via the associated system automatically or manually. In addition, it may enter TOBT (Target Off Block Time) for an aircraft operator that cannot directly enter TOBT into the system under a separate agreement with aircraft operator.
- 2.2.2.3 Aircraft operator shares up-to-date flight arrival/departure schedule information with partners automatically via its own system or manually via A-CDM System(Portal/Mobile APP), and monitors aircraft preparation status of ground handlers and provides partners with TOBT of outbound aircraft. However, under a separate agreement with an aircraft operator that cannot directly enter TOBT, ground handlers may enter TOBT instead of the aircraft operator.
- 2.2.2.4 Control Tower produces TTOT (Target Take Off Time) and TSAT (Target Start Up Approval Time) for an aircraft for which ATFM



(agreed take-off, etc.) is reflected, taking into account TOBT, CTOT, traffic conditions, en-route situation and altitude separation.

- 2.2.2.5 Apron Control Tower controls push-back clearance and taxiing of outbound aircraft, taking into account traffic conditions inside the apron and TSAT, TTOT produced by the control tower; provided that de-icing/anti-icing is performed, it shares de-icing/anti-icing information such as de-icing pad in/out time.
- **2.2.2.6 Apron Management Unit** supports update of EOBT provided by aircraft operator, allocates and adjusts aircraft stands according to the inbound/outbound schedule.
- 2.2.2.7 A-CDM Operation center performs monitoring and management of the Incheon Airport A-CDM. In case of an abnormal situation at the airport, the center forms A-CDM Cell(face to face or non face to face) and reports the situation(delay, etc.).
- 2.2.2.8 Air Traffic Command Center may issue CTOT(Calculated Take Off Time) to spread the traffic volume information, and shares it via A-CDM system(Portal/Mobile APP).

2.2.3 Procedure for Inbound Operation

2.2.3.1 Inbound milestones of Incheon Airport A-CDM consists of 7 out of a total of 16 milestones, and manages and shares 14 time parameters.

1. Flight Plan activation	EOBT-3(Dep)	3 hr prior to the originating airport EOBT
2. Flight Plan Revision	EOBT-1(Dep)	1 hr prior to the originating airport EOBT
3. Take-off	ATOT(Dep)	Actual Take Off Time from the originating airport
4. Approach Incheon FIR	FIR	Approach time to Incheon FIR
5. Approach Terminal control area	APP	Approach time to Terminal control area
6. Landing	SIBT / ELDT / ALDT EXIT / AXIT	Scheduled/Estimated/Actual landing time Estimated/Actual taxi in time
7. Arrival at stand	EIBT / AIBT ERIT/ARIT	Estimated/Actual in block time Estimated/Actual ramp in time

<Figure 2-3. Inbound Milestones and Time Parameters >


- 2.2.3.2 The inbound procedure starts with receiving and sharing departure information from the originating airport 3 hours and 1 hour prior to the off-block time of the inbound aircraft at the originating airport.
- 2.2.3.3 When an inbound aircraft takes off from the originating airport, the take-off time is received and shared via AFTN.
- 2.2.3.4 The estimated time of landing on the runway at Incheon Airport is provided as ELDT (Estimated Landing Time) when an inbound aircraft approaches Incheon Flight Information Region and Seoul Terminal Control Area in the Republic of Korea.
- 2.2.3.5 EIBT (Estimated In Block Time) of an inbound aircraft is calculated by adding EXIT (Estimated Taxi In Time) to the pre-assigned aircraft stand to ELDT prior to landing, and is calculated on the

basis of the actual movement speed of the aircraft by using A-SMGCS system. However, EIBT does not consider a situation where an inbound aircraft stand is not open.

2.2.3.6 Therefore, an aircraft operator shall maintain correct and up-to-date information on the originating airport schedule and take-off of an inbound flight. At the same time, it shall actively maintain delayed and revised schedule of an aircraft departing Incheon Airport and share it with partners.

2.2.4 Procedure for Outbound Operation

- 2.2.4.1 Outbound milestones of Incheon A-CDM consists of 9 out of a total of 16 milestones, and manages and shares 19 time parameters(except for 6 de-icing parameters).
- 2.2.4.2 All aircrafts departing from Incheon Airport shall manage to ensure that flight plan data in A-CDM portal and the flight plan data in control system(departure manager, DMAN) are identical, in order to be assigned to TSAT of control tower. The flight plan data can be checked at 'ARTS INFO COMP' menu in Integrated Information System ES(IIS-ES).

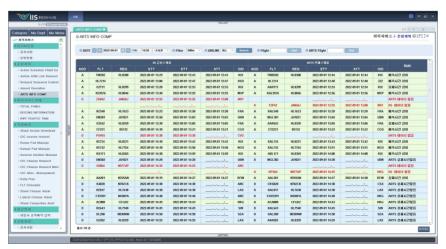

< Fig. 2-4. Flight Plan Data Comparison System>



- 2.2.4.3 The outbound milestones start with the step to commence ground handling after the arrival, and estimate and automatically share TOBT of a turn-around aircraft, taking into account MTTT (Minimum Turn-round Time) and in-block time (EIBT and AIBT).
- 2.2.4.4 TOBT, which is the most important parameter in A-CDM, is input by aircraft operators or ground handlers from 90 minutes prior to TOBT via A-CDM System(Portal/Mobile APP) or FIA system at the passenger terminal gate to be shared with partners. If TOBT deviates from the automatically calculated TOBT for over 5 minutes, TOBT shall be revised.


8. Ground Handling Commence	ACGT MTTT	Actual Commence of Ground handling Time Minimum Turn-round Time(each AO/average)
9. TOBT estimation	TOBT SOBT/EOBT	Target Off Block Time Scheduled/Estimated Off Block Time (ETD connected change)
10. TTOT calculation	TTOT CTOT	Target Take Off Time Calculated Take Off Time (Daegu ATCC)
11. TSAT issue	TSAT	Target Start Up Approval Time
12. Boarding	ASBT	Actual Start Boarding Time
13. Ready for start-up	ARDT ASRT	Actual Ready Time for taxing Actual Start Up Clearance Request Time
14. P/B clearance	ASAT	Actual Start Up Approval Time
15. Actual P/B	AOBT EROT/AROT	Actual Off Block Time Estimated/actual Ramp Out Time
16. Take-off	ETOT/ATOT EXOT/AXOT	Estimated/actual Take Off Time Estimated/actual Taxi Out Time

<Figure 2-5. Outbound Milestones and Time Parameters of Incheon A-CDM >

2.2.4.5 System TOBT(black) automatically created according to flight schedule is not applied to departure manager(DMAN) for pre-departure sequencing(PDS). The aircraft operator or ground handler shall confirm or modify TOBT 40 minutes prior to Estimated Off Block Time(EOBT), and only green TOBT are applied to departure manager(DMAN) of a control tower and utilized for calculation of TTOT/TSAT.



- 2.2.4.6 In Phase 2 Operation, TTOT is automatically calculated in DMAN(Departure Manager) based on TOBT provided by aircraft operator and then is color-coded in blue and displayed on the system(Portal/Mobile APP). Even if ATFM (Air Traffic Flow Management) is issued by Air Traffic Control Center and Calculated Take Off Time (CTOT) is in progress, TTOT is automatically calculated with top priority application to DMAN(Departure Manager) and displayed in blue.
- 2.2.4.7 In Phase 2 Operation, TSAT is automatically calculated in DMAN(Departure Manager) based on TOBT confirmed(modified) in advance by the aircraft operator, modified in blue and shared on the portal system. The pilot can be informed of blue TSAT through VDGS (Visual Docking Guidance System), control or the company frequency(operating channel of aircraft operator).
- 2.2.4.8 Aircraft operator can manage passenger boarding and flight departure with reference to TSAT provided by the Control Tower in blue based on ATFM (agreed take-off, etc.). Since route and weather conditions may cause sudden changes in TSAT, however, the aircraft operators shall monitor TSAT and weather information and take a proper measure.

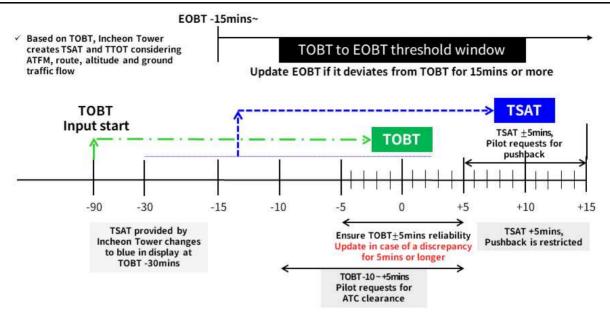


<Figure 2-6. TOBT and TSAT Flow Diagram >

- 2.2.4.9 If departure is delayed for internal reasons such as aircraft maintenance check, passenger, freight and ground handling, leading to a variance in TOBT of over 5 minutes, TOBT shall be modified. If the revised TOBT deviates from EOBT for over 15 minutes, EOBT shall be modified by sending a delay message via AFTN.
- 2.2.4.10 The pilot shall request a ATC clearance to Control Tower within TOBT
 10 to +5 minutes window. However, if it is not possible due to maintenance check, etc, the pilot shall request the relevant aircraft operator or supporting ground staff of the aircraft operator to update TOBT or EOBT to ensure that a further delay caused by clearance omission is avoided.
- 2.2.4.11 The pilot who received TSAT from the Control Tower keeps monitoring the Apron Control Tower frequency, and then contacts the Apron Control Tower within TSAT ±5 minutes window to request engine start-up and

push-back. If the pilot fails to request push-back within TSAT +5 minutes window, the flight clearance and TSAT might be cancelled. In such cases, the TOBT shall be re-entered and the clearance and TSAT may need to be re-issued.

2.2.4.12 The pilot without TSAT shall enter TOBT through the aircraft operator or the ground handler. TSAT can be issued after entering TOBT and the subsequent procedures are the same as 2.2.4.10 and 2.2.4.11.

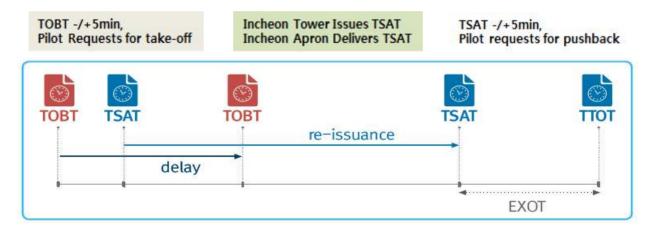


<Figure 2-7. Role of Pilot and Flow Diagram in case of Delay>

- 2.2.4.13 TSAT produced in accordance with DMAN(Departure Manager) is color-coded in blue and displayed on the system(Portal/Mobile APP). Additionally, at the aircraft stand with VDGS (Visual Docking Guidance System), TSAT is provided via VDGS at the stand.
- 2.2.4.14 Partners can check ASBT(Actual Start Boarding Time), ARDT (Actual Ready Time for movement), ASRT(Actual Start Up Clearance Request Time), ASAT(Actual Start Up Approval Time), AOBT(Actual Off Block Time), EROT(Estimated apron Out Time), ETOT(Estimated Take Off Time) and so forth, which are

automatically provided via A-CDM system(Portal/Mobile APP).

- 2.2.4.15 ETOT is calculated by adding pre-defined EXOT to TSAT. Also, after an outbound aircraft pushes back, it is provided as the estimated time required to reach the assigned runway, which is calculated on the basis of the actual taxing speed of the aircraft from A-SMGCS. Therefore, the value may be subject to change depending on push-back, traffic and taxiing speed.
- 2.2.4.16 If an outbound aircraft returns to gate after push-back due to aircraft maintenance check, passenger disembark, crew member, weather condition or for other reasons, the Apron Control Tower inputs the return-to-gate event, TTOT is cancelled and the TOBT, TSAT and TTOT values of the outbound aircraft remains unchanged. Thus, aircraft operator or ground handler shall revise EOBT and TOBT to get ready for departure.

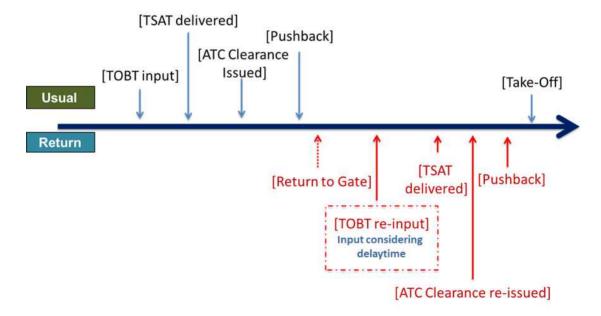

< Figure 2-8. Return-to-gate Flow Diagram >

2.3 Major Milestones

2.3.1 TOBT (Target Off Block Time)

2.3.1.1 Definition

TOBT is the time that an Aircraft Operator or Ground Handler estimates that an aircraft will be ready, all doors closed, boarding bridge removed, push back vehicle available and ready to start up / push back immediately upon reception of clearance from the apron control tower.

2.3.1.2 Necessity

TOBT serves as basic time parameter for pre-departure management that takes into account take-off sequence of an outbound aircraft and for calculation of TSAT and TTOT. Therefore, it shall be accurately managed for the purpose of accurate pre-departure management and stable operation of A-CDM.

2.3.1.3 Automatic Generation and Update

- 1. TOBT of an outbound aircraft is automatically generated from one day before the flight with reference to EOBT in the flight schedule.
- 2. If TOBT is not confirmed or modified, TOBT for reference purpose is automatically revised. But in this case, it is not applied to Departure Manager(DMAN) of the control tower for pre-departure sequencing(PSD).
 - If EIBT(AIBT) of the inbound aircraft plus MTTT (Minimum Turn-round Time) is not earlier than EOBT, TOBT is updated to the calculated value.
 - * MTTT is the total average value or pre-defined by aircraft operator.

- For other outbound aircraft, the value remains the same as EOBT.
- 3. Aircraft operator and ground handler that operate their own systems should integrate them with A-CDM and automatically update TOBT.

2.3.1.4 Input Management

- 1. Aircraft operator or ground handler is responsible for generating, managing and complying with TOBT, and the responsibility for the overall management is on the relevant aircraft operator.
- 2. An error in TOBT impedes the overall operational efficiency. Thus, in case of any change in TOBT, it shall be updated immediately.
- 3. The accuracy of TOBT shall be within the range of ±5 minutes. Therefore, TOBT shall be updated in case of a variance by over 5 minutes from automatically or manually input TOBT due to a delay caused by aircraft or ground handler including aircraft maintenance and passenger. The reliability of TOBT is separately monitored and shared.
- 4. If it is not possible to predict a delay for reasons attributable to aircraft operator and ground handler, TOBT shall be deleted, and if departure is predicted, EOBT shall be entered again as soon as possible(change EOBT if necessary).
- 5. A delay caused by external conditions such as en route and ground traffic is not reflected in TOBT. TOBT shall be updated to the latest time if planning to delay passenger boarding due to CTOT or traffic congestion.

2.3.1.5 Confirmation and Updating

Aircraft operator and ground handler manually confirm or update TOBT via A-CDM system(Portal/Mobile APP) and FIA system to ensure the reliability of TOBT according to the following procedure:

- 1. TOBT can be manually confirmed or updated from 90 minutes prior to EOBT and will be displayed in green color. However, EOBT can be updated before then, separately from TOBT.
- 2. Only TOBT(green) confirmed and updated by the aircraft operator or the ground handler shall be applied to departure manager(DMAN) of the control tower for operation of pre-departure sequencing(PDS).
- 3. If a variance of over 5 minutes is expected, TOBT shall be updated to the estimated time. When the revised TOBT deviates from EOBT for over 15 minutes, EOBT shall be modified by sending a delay message via AFTN.
- 4. When an update to the EOBT is required, a delay message shall be filed via AFTN to ensure alignment between A-CDM portal and DMAN.
- 5. Even if the EOBT is changed, the manually input TOBT will not be automatically updated.
- 6. Aircraft operator and ground handler can input and update TOBT without limitation in number of times before TSAT is color-coded in blue on the system(Portal/Mobile APP). After the color code of TSAT changes to blue in the portal system, direct input by aircraft operator and ground handler is limited. Thus, new TOBT shall be notified to the Apron Management Unit for update via wired communication. Aircraft operator and ground handler can update TOBT up to three times and after the


- third update, they shall update and share EOBT. In case of revision, TOBT cannot be greater than TSAT, and if it is greater than TSAT, EOBT shall be modified, new TOBT shall be shared. and new TSAT shall be created by the Tower.
- 7. TOBT can be entered and updated by the aircraft operator and the ground handler without restriction on number of times in FIA system until the control tower TSAT is produced. TOBT can be updated up to 3 times after TSAT is changed blue. If it is required to update TOBT over 3 times, delete existing TOBT and enter new TOBT. In this case, existing Target Start Up Approval Time(TSAT) may not be guaranteed.
- If 8. TSAT and TTOT change to blue color the on system(Portal/Mobile APP), it means that the take-off sequence has been set and take-off time and the off-block time determined. Therefore, if aircraft operator cannot comply with TSAT, it shall immediately update TOBT in order to avoid further delay caused by clearance re-issuance.
- 9. If input TOBT shows a later time point than TSAT(orange) reflecting CTOT or TSAT(blue) by the Control Tower, it will be displayed in red color on the system(Portal/Mobile APP).
- 10. If the flight for which CTOT is issued is expected to fail to comply with TSAT due to the cause attributable to the aircraft operator or the ground handler, the aircraft operator shall obtain new CTOT in consultation with Air Traffic Control Center(ATCC). When Air Traffic Control Center (ATCC) issues new CTOT, TSAT will be updated to reflect new CTOT.
- 11. The control authority may cancel TOBT for operation efficiency if the aircraft fails to comply with TSAT issued.

2.3.1.6 Input Tool

Aircraft operator and ground handler can input TOBT on the departure management screen of A-CDM System(Portal/Mobile APP) and on the FIA system installed at the terminal gate.



< Figure 2-9. TOBT entry screen on A-CDM System(Portal/Mobile APP)>



< Figure 2-10. TOBT entry screen on A-CDM System(Mobile APP) >



< Figure 2-11. TOBT input screen on FIA >

2.3.1.7 Display and Utilization

TOBT is displayed on PDU (Pilot Display Unit) of VDGS from 30 minutes prior to TOBT. In addition, if there exists TSAT issued by the control tower and CTOT issued by the air traffic control center, TOBT, TSAT and CTOT are all displayed. At the aircraft stand without VDGS or at the aircraft stand where VDGS is under maintenance, aircraft operator shall provide TOBT, TSAT and TTOT information by using the company frequency.

2.3.2 TSAT (Target Start-up Approval Time)

2.3.2.1 Definition

TSAT (Target Start-up Approval Time) is the estimated time when the Apron Control Tower is expected to approve engine start-up and push-back for an outbound flight. It is calculated through the Departure Manager(DMAN) of the control tower based on TOBT confirmed (updated) by the aircraft operator or the ground handler, taking into account ATFM limitations, ground movement time, runway capacity, control separation, traffic situations, etc. However, in Phase 1 Operation, TSAT is divided and shared as follows:

1. System TSAT: as the time automatically created by A-CDM

- system not applied with pre-departure sequencing(PSD), it is displayed as the same value of system TOBT.
- 2. TSAT reflecting CTOT : adjusted to CTOT which is provided from ATCC depending on VTT.
- 3. Tower TSAT: the pushback time calculated and provided by departure manager (DMAN) of the control tower for pre-departure sequencing.

2.3.2.2 Necessity

TSAT is provided so that aircraft operator can predict push-back time in advance to manage passenger boarding and to get ready for departure efficiently.

2.3.2.3 Automatic Generation

- 1. System TSAT: TSAT automatically created by A-CDM system is the time for checking before issuing of control tower TSAT applied with operation procedure of pre-departure sequencing(PSD) and is displayed in black and shared through the system (portal/mobile APP).
- 2. TSAT depending on CTOT: adjusted to CTOT(provided from ATCC for ATFM due to weather conditions and en-route congestion) depending on VTT and it is displayed in orange. However, if TSAT reflecting CTOT displays an earlier time point than the airlines-provided TOBT, it is displayed in red. If push-back is not possible at the timing of shared TSAT, it is necessary to contact ATCC to get a new CTOT issued.


2.3.2.4 Generation and Update at DMAN

The Control Tower calculates TTOT through departure manager (DMAN) and calculates TSAT, taking into account the time required to taxi from the gate to the assigned runway, together with TTOT. TSAT generated at DMAN is provided at TOBT-30 minutes, changes previous TSAT reflecting CTOT and system TSAT automatically generated in A-CDM System(Portal/Mobile App) and shares them in blue.

2.3.2.5 Display and Provision

TSAT is divided into System TSAT automatically generated on A-CDM System(Portal/Mobile) and Tower TSAT provided through DMAN, etc. by the Control Tower, and TSAT reflecting CTOT from ATCC.

1. System TSAT automatically generated on A-CDM System(Portal/Mobile APP) is displayed in black, and TSAT reflecting CTOT is displayed in orange. In this case, the pilot does not receive TSAT information, and it is not displayed on VDGS.

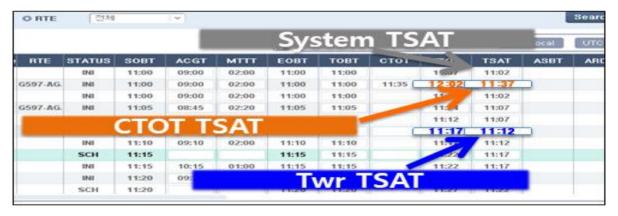


<Figure 2-12. TSAT display screen >

2. If the Control Tower produces Tower TSAT taking into account ATFM, it is displayed in blue at the System(Portal/Mobile APP). The pilot can

receive TSAT upon request, or if needed, when obtaining a ATC clearance by the Control Tower or when contacting the Apron Control Tower. However, there might be a delay in providing TSAT, depending on the consultation with Incheon Air Traffic Control Regional Office for reasons such as en route and consultation with surrounding countries.

- 3. At the aircraft stand that has VDGS, Tower TSAT produced by the Control Tower through DMAN, etc. with TOBT, CTOT(if issued) is displayed.
 - Terminal 1/2 VDGS: TOBT and Tower TSAT both displayed on PDU.
 - Concourse VDGS: TOBT displayed on PDU is changed to Tower TSAT
- 4. In case VDGS is inoperable or the aircraft stand does not have VDGS, aircraft operator or ground handler shall provide TSAT information for the pilot by using company frequency, if necessary.

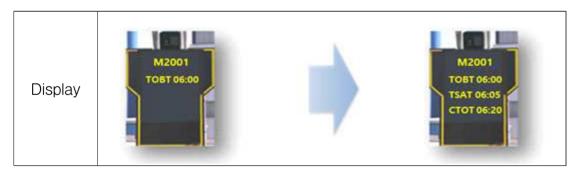

< Figure 2-13. TSAT display screen >

2.3.2.6 Utilization

If there is a big difference between TOBT and TSAT, aircraft operator and ground handler can perform departure management including ground handling and boarding based on Tower TSAT produced by the Control Tower, and in such cases, TOBT shall be updated to the latest time.



2.3.2.7 Update

TSAT may be subject to change due to environmental changes (change in take-off sequence as the preceding flight fails to depart, additional delay in the route or early termination of ATFM due to improved weather condition at the destination, etc.), and if TSAT background changes. the cell color of TSAT on the system(Portal/Mobile APP) will change to sky-blue color. Thus, it is required for the aircraft operator to keep monitoring whether TSAT was revised continuously and secure sufficient time to get ready.

2.3.2.8 Cancellation

The pilot shall request ACT clearance within -10 mins.~+5 mins window of TSAT. If ATC clearance is not requested by TOBT + 5 minutes, TSAT of the flight will be cancelled. In this case, the aircraft operator shall update the existing TOBT for the relevant flight to obtain TSAT again. In addition, if engine start and pushback are not requested to the Apron Control Tower by TOBT +5 minutes, issued ATC clearance and TSAT will be cancelled.

2.3.3 TTOT (Target Take-Off Time)

2.3.3.1 Definition

TTOT is the estimated time of take-off from the runway and calculated through departure manager (DMAN) of control tower based on TOBT confirmed(updated) by the aircraft operator or the ground handler, taking into account ATFM limitations, ground taxing time, runway capacity, control separation and traffic conditions.

In A-CDM of Incheon Airport, TTOT is divided and shared as follows:

1. System TTOT: TTOT automatically created in A-CDM system is

the time for checking before issuing of control tower TTOT applied with operation procedure of Pre-departure Sequencing(PDS). system TSAT is TOBT + aircraft moving time from the stand to the runway.

- 2. TTOT reflecting CTOT: take-off time provided by ATCC considering ATFM(agreed take-off, etc.) and airspace conditions.
- 3. Control Tower TTOT: take-off time calculated by departure manager(DMAN) after the consultation with ACC considering restriction on operations and traffic conditions at Incheon Airport, etc. for Pre-departure Sequencing(PDS).

2.3.3.2 Necessity

TTOT serves as the reference time that becomes the basis for accurate TSAT estimation and calculation. It enables each partner to predict when the flight will take off.

2.3.3.3 Automatic Generation

- 1. System TTOT: Automatically generated TTOT refers to the time when the pilot gets ready according to TOBT, obtains a clearance, pushes back and taxies and is fully ready to take off from the runway. It is automatically shared via System(Portal/Mobile) one day before, color-coded in black. Therefore, automatically generated TTOT may be different from actual take-off time, depending on delay or taxiway congestion.
- 2. TTOT reflecting CTOT: adjusted to the same time of CTOT, which is provided from ATCC for ATFM considering weather conditions and en route congestion, reflecting VTT. TTOT is displayed in orange. However, if TSAT reflecting CTOT is earlier than the airlines-provided TOBT, it is displayed in red. If push-back is not


possible at the time of shared TSAT, it is necessary to contact ATCC to get a new CTOT issued.

2.3.3.4 Generation and Update at DMAN

The Control Tower provides TTOT calculated by DMAN based on TOBT confirmed(updated) by the aircraft handler or ground handler. TTOT(blue) provided by the Control Tower substitutes System TTOT(black) automatically generated on the System(Portal/Mobile APP)) and TTOT(orange) reflecting CTOT

2.3.3.5 Display and Provision

On the portal system, TTOT is divided into System TTOT(black) automatically generated on A-CDM System, TTOT(orange) reflecting CTOT of ATCC, and Tower TTOT (blue) provided from the Control Tower and shared on the portal system (Portal/Mobile APP). If the blue TTOT changes due to the en-route situation, the cell background color of TTOT will change to sky-blue color.

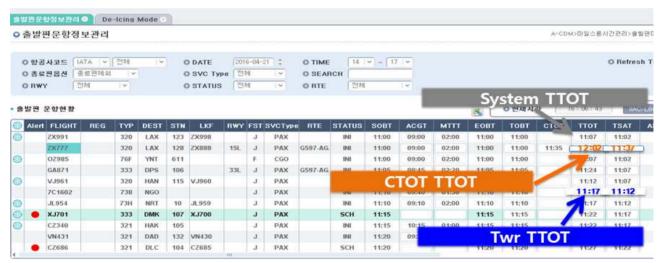

<Figure 2-14. TTOT display screen >

2.3.3.6 Utilization

1. The calculated TTOT may change due to congestion on the runway and the taxiway and sudden change of the runway, and may be



different from ATOT (Actual Take-Off Time).

2. In case an outbound aircraft is on standby on the taxiway or in another area after push-back due to aircraft maintenance check, etc. and taxis again (except for return-to-gate), automatically calculated TTOT may be different from ATOT (Actual Take-Off Time).

2.3.3.7 Cancellation

In case an outbound aircraft returns to the stand after push-back or during taxing, TTOT is cancelled and the TOBT, TSAT and TTOT values of the flight remain unchanged. Therefore, aircraft operator shall revise TOBT and EOBT to obtain a new ATC clearance without causing any confusion in departure.


2.4 De-icing/Anti-icing

2.4.1 De-icing/Anti-icing Procedure

- 2.4.1.1 Aircraft operator or ground handler shall manage TOBT in preparation for the operation during snowfall. If de-icing/anti-icing is necessary, the request can be made through system(portal/mobile APP) or the pilot makes a request for de-icing/anti-icing to the Apron Control Tower. The same procedure is followed when canceling de-icing/anti-icing.
- 2.4.1.2 The Apron Control Tower allocates a de-icing zone and pad according to the de-icing/anti-icing request from the pilot and the order of flight ready for departure. EPIT(Estimated de-icing Pad In Time) and EPOT(Estimated de-icing Pad Out Time) are automatically created at the time when de-icing zone are assigned.

Assigned information can be checked at Airside Control Menu – Deicing Information in IIS(Integrated Information System).

- **2.4.1.3** DMAN(Departure Manager) calculated TTOT/TSAT considering de-icing task using de-icing pad, EPIT and EPOT.
- **2.4.1.4** The Apron Control Tower approves the pushback according to the deicing sequence and traffic situation in the apron.
- 2.4.1.5 The Apron Control Tower enters the APIT(Actual de-icing Pad In Time) when the aircraft enters the designated de-icing pad and ground handlers(ICE-HOUSE) enters ACZT(Actual Commence of De-icing Time) according starting of de-icing task.
- **2.4.1.6** EPOT will be updated according to APIT occurrence and the Control Tower utilizes the updated EPOT for issuing of flight clearance and TTOT update.
- 2.4.1.7 Ground handlers(ICE-HOUSE) enters AEZT(Actual End of De-icing Time) when deicing work is finished. If it is difficult to comply with EEZT(Estimated End of De-icing Time) due to replenishment of de-icing fluid or other causes(±5 minutes scope), the aircraft operator or ground handler shall update EEZT(Estimated End of De-icing Time) using IIS(Integrated Information System). EPOT(Estimated de-icing Pad Out Time) and TTOT(Target Take Off Time) are updated according to updated EEZT.
- **2.4.1.8** If an aircraft that has requested de-icing returns to the gate after pushback and needs to request de-icing again, the procedure in 2.4.1.1 shall be followed.

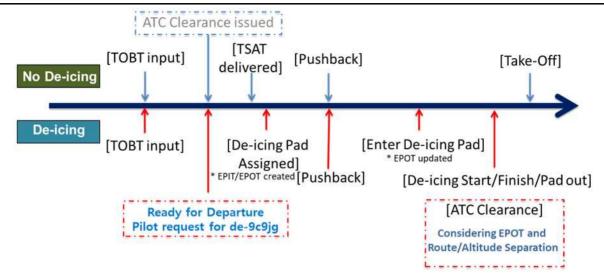

<Figure 2-15. De-icing/Anti-icing Operation Flow Diagram>


2.4.2 Display and Provision

2.4.2.1 If an outbound aircraft requests de-icing/anti-icing to the Apron Control Tower, de-icing/anti-icing information will be displayed on the left side of the outbound flight information management screen on A-CDM portal.



< Figure 2-16. De-icing/Anti-icing information display screen on Portal >

2.4.2.2 De-icing/anti-icing information is displayed in Departure Information and Details in Mobile App. and information related to de-icing zone and pad will be shared real time.



< Fig. 2-17. De-icing Information Display Screen in Mobile APP >

- 2.4.2.3 EPIT, calculated initially with the allocation of de-icing pad is generated in consideration of travel time from apron to pad and will be updated according to occurrence of ASAT·AOBT.
- 2.4.2.4 Initially calculated EPOT is calculated as the sum of EPIT·EDIT·and other time and will be updated according to APIT generation thereafter. If any delay of de-icing work is expected due to replenishment of de-icing solution or other causes, the aircraft operator or the ground handler may update EPOT through update of EEZT(Estimated End of De-icing Time). In this case, EPOT will be updated as the sum of EEZT and other time.

2.4.2.5 APIT(Actual de-icing Pad In Time) and APOT(Actual de-icing Pad Out Time) shall be provided by the Apron Control Tower, ACZT(Actual Commence of De-icing Time) and AEZT(Actual End of De-icing Time) by ground handler(ICE-HOUSE).

Chapter 3 A-CDM System(Portal/Mobile)

3.1 System Overview

A-CDM System(Portal/Mobile) is one module of the Integrated Information System (IIS) and enables partners (Air Traffic Control Unit, Airport Corporation, aircraft operator, ground handler) to share flight movement time including departure from Incheon Airport or arrival at Incheon Airport, and departure again.

Key inbound/outbound information provided by the portal system is also displayed on the mobile APP.

3.2 How to Access Portal System

3.2.1 Request for Account and Password Management

Those who wish to use the portal system shall prepare and request an application for account online at Integrated Information System User Account Service(http://iisaccount.airport.kr). If the application is submitted successfully, a text message 'completed' will be sent to the phone number in the application form.

3.2.2 System Installation and Login


- 1. Installs the system using the link http://iis.airport.kr:21781/ui/Install/install.html and then icon will be created on the desktop.
- 2. Execute the icon, enter ID and password and click on the Login button.
- 3. A message for OTP (One Time Password) authentication will be called. Click the OK button, and authentication method combo box and OTP Send button will be activated.





< Figure 3-1. Portal system login screen >

4. After OTP authentication is complete, log in and click on A-CDM Portal.

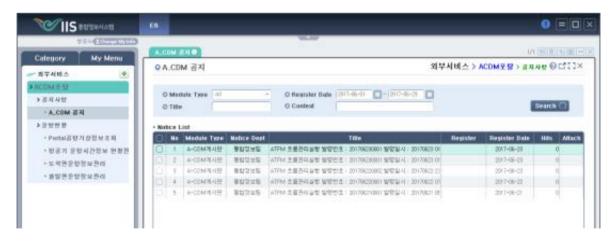

< Figure 3-2. Initial screen after login to the portal system >

3.3 Layout of All Menus

Menu Name	Description
Display Notice	Display notices on airport conditions
	including ATFM and the portal system
Display Airport Weather Information	Display weather information at Incheon International Airport
Manage Flight Schedule and Status	Manage flight schedule information and status
Manage Inbound Flight Information	Enter, change, delete and display arrival time information
Manage Outbound Flight Information	Enter, change, delete and display departure information

3.4 Main Screens

3.4.1 Display Notice

3.4.1.1 Register and Display

A user can register and display system notices and various notices on airport operation.

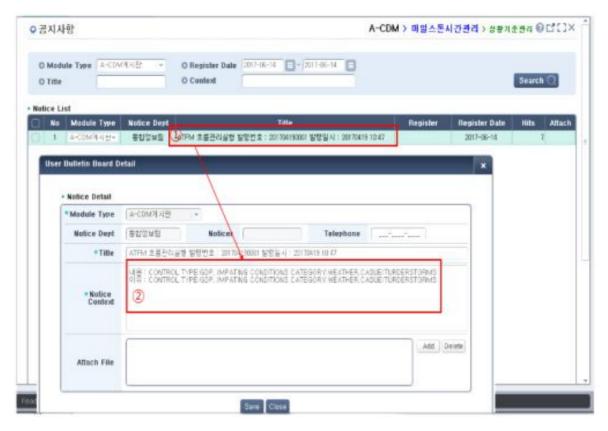


Figure 3-3. Screen to view notices >

- ① A user can display notices by entering search conditions (Register Date, Title, Context).
- ② A user can enter a new notice by clicking the Register button.

3.4.1.2 Display ATFM (Air Traffic Flow Management) Information

A user can check implementation information of flow management (ATFM) transmitted from ATFMS of the Air Traffic Command Center. At the initial moment when ATFM is generated by ATCC, the system will open up a pop-up window that contains ATFM. Afterwards, a user can view the information in the Notice in the menu.




< Figure 3-4. Notice detailed view screen >

- ① If a user wants to view details of the ATFM flow management, double click the implementation number and date, and double-click the field.
- ② A user can view details and a reason of the implementation of ATFM flow management.

3.4.2 Display Airport Weather Information

In this screen, users can display information on airport weather conditions that affect the operation of milestones. Information is automatically refreshed every two minutes. It displays information on runways currently in use and other weather conditions. However, there might be delay or difference from the actual information due to an environment of the interface with the Aviation Meteorological Office.

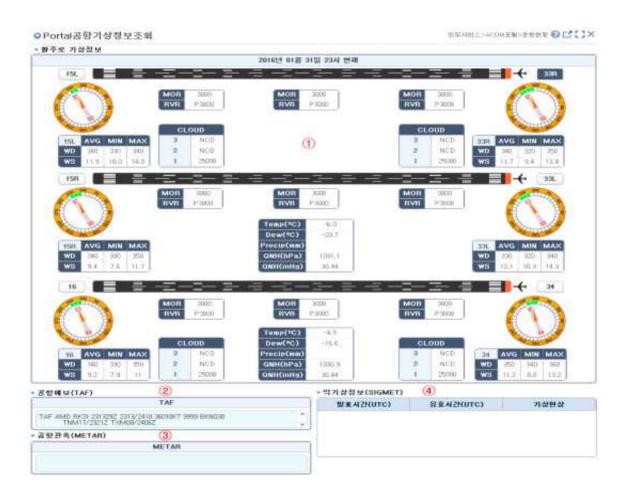


< Figure 3-5. Screen to display airport weather information >

- ① Runway weather information: Runway currently in use, wind, fog, cloud information
- 2 Terminal Aerodrome forecast: The latest TAF information as of the current date
- ③ Meteorological Aerodrome Report: The latest METAR information as of the current date
- 4 Significant Meteorological information: The latest SIGMET information as of the current date

3.4.3 Manage Flight Schedule and Status

This screen enables A-CDM users to view departure/arrival time information by aircraft. A user enters Airline Code, Date, Time, Completed, SVC Type, RWY, STATUS and RTE (outbound flight) to search for results and manage information. Airline code can be found in IATA and ICAO information, and it is also possible to filter the search results.

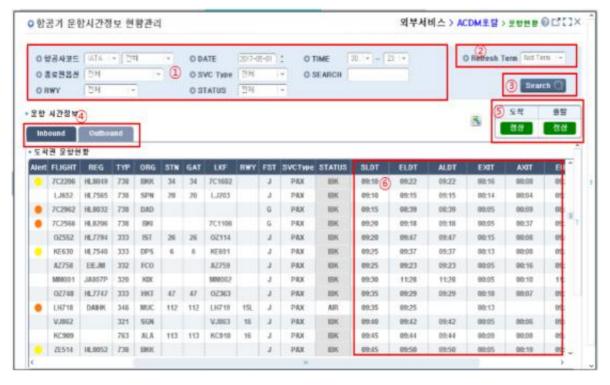

< Figure 3-6. Screen to manage flight schedule information and status >

- ① Fields to enter search conditions
 - Airline Code (IATA, ICAO), DATE, TIME, Completed, SVC
 Type, RWY, STATUS, RTE (for outbound flight)
- ② Define the refresh interval (Refresh Term).


 Not Term, 30 sec, 1 min, 3 mins, 5 mins
- 3 Click the Search button to display the up-to-date information.
- 4 Select Inbound or Outbound to display flight schedule information.
- ⑤ Display departure/arrival status information (normal, slightly congested, congested, emergency)
 - Normal: delayed flights per hour account for less than 5 %
 - Slightly congested: delayed flights per hour, ATA/ATD against
 STA/STD, account for 5 10%
 - Congested: delayed flights per hour, ATA/ATD against STA/STD, account for 10-30%
 - Emergency: Abnormal situation (delayed flights per hour account for 30% or higher)
- 6 Display milestone time information.

3.4.4 Manage Inbound Flight Information

3.4.4.1 General

A-CDM users can view time information of inbound flight. Users enter Airline Code, DATE, TIME, Completed, SVC Type, RWY and STATUS to search for results and manage information. IATA and ICAO airline code can be used for searching, and it is also possible to filter the search results.



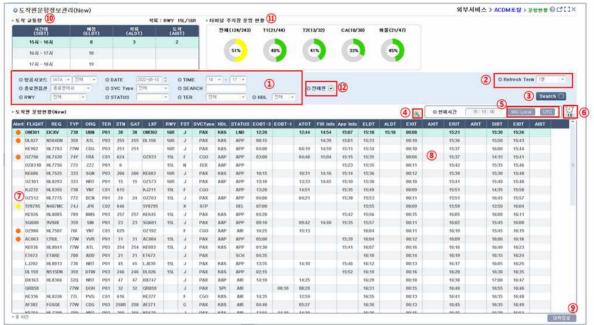


< Figure 3-7. Screen to manage inbound flight information >

- ① Fields to enter search conditions.
 - Airline Code (IATA, ICAO), DATE, TIME, Completed, SVC Type,
 RWY, STATUS, TER, HDL
- ② Define the refresh interval (Refresh Term). Not Term, 30 sec, 1 min, 3 mins, 5 mins
- 3 Click the Search button to display the up-to-date information.
- 4) Click on the Excel download button to export the data on the screen to an excel file.
- ⑤ Select the current time information Type(IIAC-Local, UTC).
- 6 Display the number of flights for which alert was generated.
- 7 Indicate the flights for which alert was generated.
- 8 Search milestone time information of inbound aircraft.
- 9 Check the change history of flight milestone.
- ① Display the inbound traffic information.
- ① Display the operation status of terminal apron.
 - Color changes according to apron occupancy(90% or more: red, 70% or more: orange, 50% or more: yellow, 50% or less: green)
- ② Select All Flights checkbox to search all flights.

3.4.4.2 Display the detailed status of inbound flight and detailed status


In the flight information displayed, double-click FLIGHT, REG, TYP, ORG (DEST) columns to display a pop-up window that shows the detailed status of the selected inbound flight. Detailed information of flight and information on occurrence of Alert(Alarm message in 3.7) are displayed for checking.

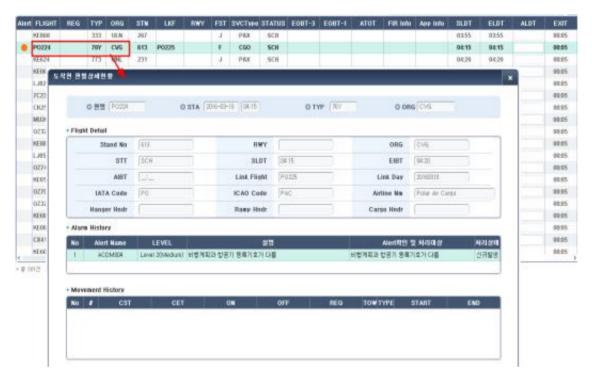

< Figure 3-8. Screen to display the detailed status of inbound flights >

3.4.4.3 Display the status of flight operation

Double-click the STATUS colum-*9+n in the flight information displayed and the system will open a pop-up window that shows the operation status of the selected flight operation.

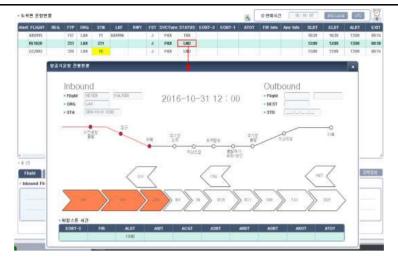

< Figure 3-10. Screen to display the status of flight operation >

3.4.4.4 Display flight, ground movement and alarm information

Click the Flight tab, the Ground Movement tab and the Alarm tab, and the information will be displayed for each tap as follows:




< Figure 3-11. Screen to display detail taps for inbound flight status >

3.4.5 Manage Outbound Flight Information

3.4.5.1 General

A-CDM users can view time information by outbound flight. Users enter Airline Code, DATE, TIME, Completed, SVC Type, RWY, STATUS and RTE to search for results and manage information. IATA and ICAO airline code can be used for searching, and it is also possible to filter the search results.

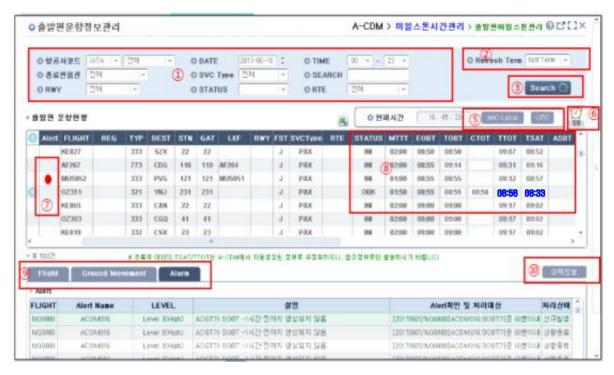

< Figure 3-12. Screen to manage outbound flight information >

- ① Fields to enter search conditions
 - Airline Code (IATA, ICAO), DATE, TIME, Completed, SVC
 Type, RWY, STATUS, TER, HDL
- ② Define the refresh interval (Refresh Term).
 - Not Term, 30 sec, 1 min, 3 mins, 5 mins
- ③ Click the Search button to display the up-to-date information.


Rev. 5

- 4) Click on the Excel download button to export the data on the screen to an excel file.
- ⑤ Select the current time information Type(IIAC-Local, UTC).
- 6 Display the number of flights for which alert was generated.
- ① Indicate the flights for which alert was generated and flights subject to de-icing/anti-icing.
- 8 Display milestone time information of outbound flights.
- 9 Check the change history of flight milestones.
- ① Display the departure traffic volume and information on runway within 1 hour.
- ① Display operating status of terminal stand.
 - Color changes according to apron occupancy(90% or more: red, 70% or more: orange, 50% or more: yellow, 50% or less: green)
- ② Display the number of flight delayed by 1 hour or more.
- 3 Select All Flights checkbox to search all flights.

Detailed functions are same as Manage Inbound Flight Information described in 3.4.4.

3.4.6 Display Milestones of De-icing/Anti-icing Aircraft

Users can display milestone time of a de-icing/anti-icing aircraft in the Manage Outbound Flight Information screen.

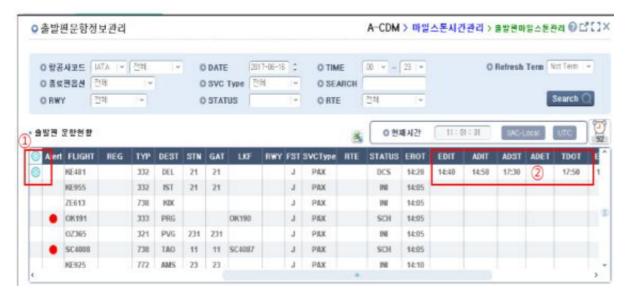

< Figure 3-13. Screen to check and display de-icing/anti-icing aircraft >

- ① For de-icing/anti-icing aircraft, a snow icon will be shown on the left column of the flight name. If a de-icing/anti-icing is requested through system(portal/mobile APP) or the pilot requests de-icing/anti-icing to the Apron Control Tower, the flight is marked as de-icing/anti-icing aircraft as shown above.
- ② Users can display milestone time information of de-icing/anti-icing aircraft.

3.5 TOBT Update

3.5.1 TOBT Input on A-CDM System(Portal/Mobile)

① Click TOBT on the Manage Outbound Flight Information screen, and the system will open a pop-up window to register milestone time information.



< Figure 3-14. TOBT input screen on the portal system >

② Aircraft operator/ground handler revises TOBT time, selects/enters a reason and then clicks on the Save button. TOBT can be updated up to 3 times after TSAT is changed blue. If it is required to update TOBT over 3 times, delete existing TOBT and enter new TOBT.

3.5.2 TOBT Input via Gate FIA

- ① Check the outbound flight on the FIA screen and enter the time in the TOBT change field.
- 2) Push the function key 'F6' without time change and TOBT will be confirmed.
- 3 Push 'F6' after time change and TOBT will be updated.
- 3 Push 'F7' function key to delete TOBT.



< Figure 3-15. TOBT input screen on the Gate FIA system >

3.5.3 TOBT Input via Mobile APP

- ① After logging in the mobile APP, revise TOBT by clicking TOBT of the flights on the screen of outbound flight.
- ② Make sure that the revised TOBT is successfully reflected on the screen of outbound flight.



< Figure 3-16. TOBT Input screen on the Mobile A-CDM >



3.6 Mobile APP

3.6.1 Overview

Mobile APP is a system that allows users to check key inbound/outbound milestones via mobile anywhere and anytime. It displays data from A-CDM portal system.

3.6.2 How to Access System

3.6.2.1 Request for Account and Password Management



< Figure 3-17. Initial Screen of Mobile A-CDM >


Download "Incheon Airport A-CDM" from the smart phone store(Google Play or App Store) and select the account application button on the center of the screen. Fill out the application form after

agreeing to information collection and information protection agreement. When the account is successfully approved, initial temporary password will be sent to the mobile phone indicated at application, and the password must be changed at the first login.

3.6.2.2 Login

Connect to the Mobile APP, enter your ID and password, click the Login button, and enter the OTP number sent to your account's phone number.

3.6.3 Main Screen

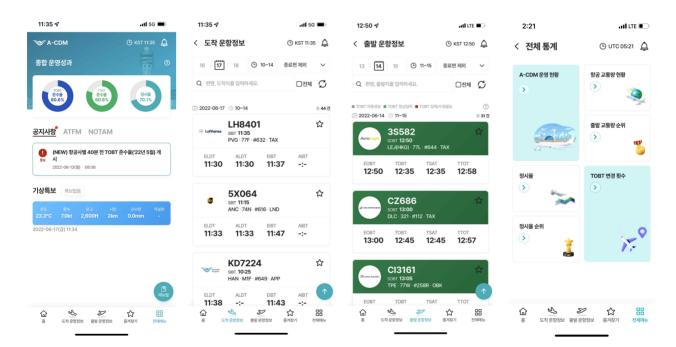

< Figure 3-18. Main Screen of Mobile A-CDM >

3.6.3.1 Home Menu

It consists of A-CDM comprehensive operation performance, notice, ATFM, NOTAM issues and weather special report, and details for each item can be checked.

3.6.3.2 Arrival Flight Information

Be able to check the key milestones of the inbound flights and search for them with the flight name and departure key words.

3.6.3.3 Departure Flight Information

Be able to check the key milestones of outbound flights of its own and those of third party and search for them with the flight name and destination key words.

The color information used is the same as the portal system, and more milestones can be checked by clicking on the flight names. Account users who have applied for TOBT inputs access may confirm or modify their own flights' TOBT as follows. After modification, users need to make sure that the modified time is reflected.



< Figure 3-19. TOBT entry screen on Mobile APP >

3.6.3.4 Favorite

Be able to search the list of favorite flight for push alarm for each situation.

3.6.3.5 All Menus

You can see all the menus in APP, register patterns for simple login and execute general user management menu for the $1^{\rm st}$ approval of the intermediate manager.

3.7 Alarm Message

ALERT	Description
ACDM003	(Situation) The aircraft type does not correspond with the type in the flight plan.
	(Display) The aircraft type does not correspond with the type in the flight plan. It is needed to check and correct the flight type.
ACDM004	(Situation) The aircraft registration does not correspond with the registration in the flight plan.
	(Display) The aircraft registration does not correspond with the registration in the flight plan. It is needed to check and correct the aircraft registration.
ACDM005	(Situation) The aircraft destination airport does not correspond to the destination in the flight plan.
	(Display) The aircraft destination airport does not correspond to the destination in the flight plan. It is needed to check and correct the destination airport.
	(Situation) EIBT+MTTT exceeds TOBT+5 mins.
ACDM007	(Display) Check SOBT of the outbound flight and update EOBT or TOBT, if necessary.
ACDM008	(Situation) TOBT is outside EOBT over 15 mins window.
	(Display) TOBT and EOBT have a discrepancy by over 15 mins. or more. Update EOBT.
ACDM009	(Situation) ASBT has not occurred until TOBT-10 min.
	(Display) The aircraft boarding has not started. Update EOBT or TOBT.
	(Situation) ARDT value does not exist within TOBT+5 mins window.
ACDM011	(Display) TOBT tolerance (5 mins) was exceeded. Update EOBT or TOBT.
ACDM022	(Situation) ASRT is not input until Tower TSAT +5 min is exceeded.
	(Display) The pilot is not compliant with Tower TSAT. Update EOBT or TOBT for new TSAT.
ACDM013	(Situation) No ATC flight plan available.
	(Display) There is no ATC flight plan.
ACDM034	(Situation) Return-to-stand
	(Display) The outbound aircraft has returned back to the stand. Update EOBT.

Rev. 5

ALERT	Description	
ACDM035	(Situation) TSAT reflecting CTOT is less than TOBT	
	(Display) TSAT reflecting CTOT is earlier than TOBT, so please contact Air Traffic Command Center for a new CTOT.	
ACDM036	(Situation) CTOT is received earlier than current time	
	(Display) CTOT received from ATFMS is earlier than current time and is not applied. Please contact ATCC for CTOT reissuance.	
ACDM037	(Situation) twr TSAT is deleted after issuance	
	(Display) twr TSAT has been deleted. Please enter TOBT again.	
ACDM038	(Situation) AEZT is not input until EEZT +5 min is exceeded.	
	(Display) AEZT is not input until EEZT +5 min is exceeded.	
ACDM039	(Situation) Tower deleted the TOBT.	
	(Display) TOBT has been deleted. Re-enter the TOBT.	
ACDM040	(Situation) If a discrepancy of more than 15 min between the EOBT in ARTS and IIS.	
	(Display) The EOBT in ARTS and IIS differs by more than 15 minutes. If the difference exceeds 30 minutes, the flight may be excluded from TSAT issuance. Update EOBT via AFTN delay message.	



3.8 Flight Status Information

A/D	Status	Description
Arrival	SCH	Schedule
	AIR	Airborne(Take off from ORG)
	FIR	Flight entered local FIR
	APP	Final Approach
	LND	Landing
	TAX	Taxing
	IBK	On Block
Departure	SCH	Schedule
	INI	Ground handling Initiates
	BOR	Boarding
	GTC	Gate Closed
	RDY	Ready (in case of PBB release)
	OBK	Off Block
	TAX	Taxing
	DCI	De-icing pad in
	DCS	De-icing Start
	DCE	De-icing End
	DCO	De-icing pad out
	RRT	Ramp Return
	DEP	Take Off
_	DEL	Delay
	CNL	Cancel
	DIV	Divert

Chapter 4 Contingency Procedures

4.1 Overview

Air Traffic Service Unit, Airport operator, aircraft operators and ground handlers share TOBT, TSAT, TTOT and so on via A-CDM System(Portal/Mobile). The information provided by the system enables individual partners to perform reasonable decision–making. Nonetheless, if such information is not shared normally due to a problem of A-CDM system or other associated systems, relevant parties shall respond to the situation according to the following procedure to minimize confusion.

4.2 Types of Contingency

4.2.1 Interruption of A-CDM System(Portal/Mobile)

A situation in which all information sharing and services are completely unavailable due to system failure in Incheon Airport A-CDM.

4.2.2 Interruption of Mobile A-CDM System

A situation in which mobile service is unavailable due to failure of Mobile system or A-CDM Portal.

4.2.3 Interruption of Interfaced System

A situation in which some of information sharing and provision are unavailable due to system failure or interface failure in a system linked with Incheon Airport A-CDM. The situation includes an interface problem with an aircraft operator system as well.

4.2.4 System Failure due to User Operation Interface

A situation in which information sharing and provision are partially unavailable in a certain area due to a partner's internal circumstance although other systems linked with Incheon Airport A-CDM are in normal condition.

4.2.5 In the event of a massive delay due to abnormal situation

Massive delay due to abnormal situation is as follows:

- 1. In case of airport congestion and massive delays caused by the take-off stop continued for more than one hour due to bad weather such as low visibility(not applicable for late and non-congested hours)
- 2. In case CTOT is not issued due to complicated ATFM restrictions and there are massive delays of outbound flights and congestion in the airside.

4.3 Response Procedure

4.3.1 In Case of A-CDM Portal Service Unavailable

4.3.1.1 Non A-CDM Procedure

- 1. Without TOBT input, aircraft operator and ground handler should comply with ETD (EOBT) and in case of delay, they should update ETD (EOBT) to get ready for departure.
- 2. Pilot should comply with the departure procedure in Incheon AIP.

4.3.2 In Case of Mobile A-CDM System Service Failure

- 1. Follow the normal A-CDM Operation procedure with A-CDM Portal system.
- 2. However, in the event of a Mobile APP failure due to A-CDM Portal System failure, the system is operated in accordance with Non A-CDM procedure.

4.3.3 In Case of Interface failure

4.3.3.1 Failure of ATC system (including ACC)

- 1. TSAT and TTOT supposed to be provided by the Control Tower are not provided while only TSAT and TTOT automatically calculated in A-CDM are provided. VDGS at the stand displays TOBT only. If the TSAT produced by the Control Tower is shared with A-CDM Operation Center, however, A-CDM Operation Center provides Tower TSAT via A-CDM System.
- 2. Aircraft operator should manage TOBT as usual so that TSAT and TTOT can be provided normally once the system is restored.
- 3. Also, aircraft operator should input and manage TOBT continuously because TOBT from aircraft operator is utilized for the purpose of aircraft stand operation and adjustment for inbound flights.

4.3.3.2 Failure in Interface with the Air Traffic Command Center

CTOT/COBT from the Air Traffic Command Center is not transmitted to A-CDM System(Portal/Mobile).

4.3.3.3 Failure in Interface with Aircraft Operator/Ground Handler System

- 1. Flight information shared by the relevant aircraft operator/ground handler is displayed as the previous STD and information established before failure.
- 2. Aircraft operator/ground handler should provide TOBT via the portal system and Gate FIA, and request EOBT update to the Apron Management Unit via wired communication to share TOBT with partners.

4.3.3.4 VDGS Failure

- 1. Since TOBT and TSAT provided by the Control Tower with ATFM (agreed take-off, etc.) are not displayed in VDGS, aircraft operator and ground handler need to refer to A-CDM System.
- 2. The pilot is provided with TSAT when he/she contacts the Control Tower for ATC clearance. If the pilot needs to reconfirm TSAT, he/she is able to communicate via ATC frequency or company frequency.

4.3.3.5 Gate FIA Failure

As it is not possible to input TOBT at the gate, aircraft operator or ground handler should input TOBT on A-CDM System(Portal/Mobile APP).

4.3.3.6 A-SMGCS Failure

Given that it is not possible to calculate and provide the estimated movement time using the actual speed of the aircraft, statistical average figures are provided for ETOT after outbound flight push-back and for EIBT after inbound flight landing.

4.3.4 In the event of a system limitation due to user operation interface

In case information sharing is limited due to internal circumstances of partners such as PC terminal problems such as breakdown or network failure, aircraft operator or ground handler should input TOBT on the portal system, and requests EOBT update to the Apron Management Unit via wired communication to share TOBT with partners as soon as possible.

4.3.5 In the event of a massive delay due to abnormal situation

- 1. The Control Tower determines necessity and possibility whether or not the departure list can be calculated. If necessary, it produces pre-departure list before departure and provide it to A-CDM Operation Center.
- 2. A-CDM Operation Center shares the pre-departure list provided via notice on A-CDM System(Portal/Mobile)
- 3. Aircraft operators prepare aircraft operations in consideration of ATFM conditions, pre-departure list provided and delays, etc.